

Logan W - Diffuser

Diffusion
PRO AUDIO & STUDIO

Specifications

Acoustic performance:

Scattering range | 600Hz to 6000Hz

FG | 595x595x60 mm

Finishing Material:

MDF Lacquer - FG (Furniture grade)

Click on a certain finish for more detailed information

Installation:

Mechanical




Description


Logan Diffuser provides diffusion over any bandwidth, given the precise width and depth of the integrated surface treatment. The scattering begins at 400 Hz and goes up to 4000 Hz. Usable for all noise control, but above all for musical applications.

Logan is a high quality and high performance solution for broadcasting, recording or post production studios, and music practice rooms. With a furniture grade quality and available in several woods and finishes.

Technical Information

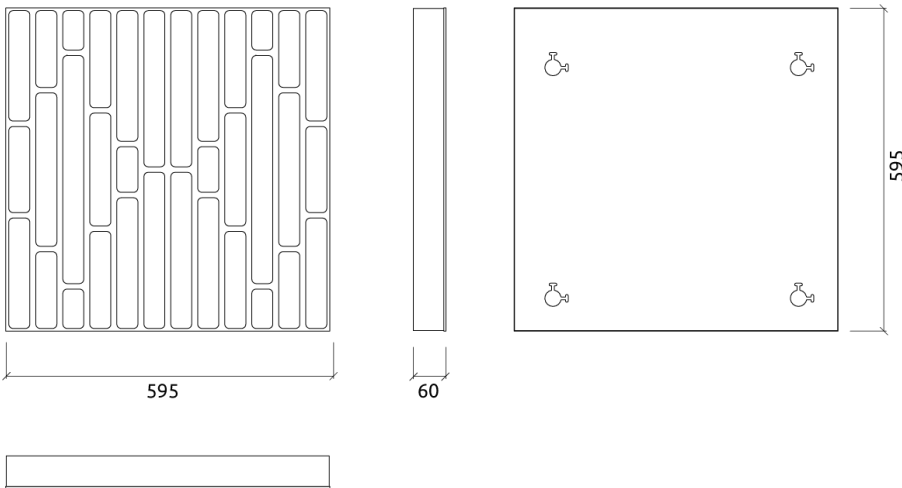

Performance

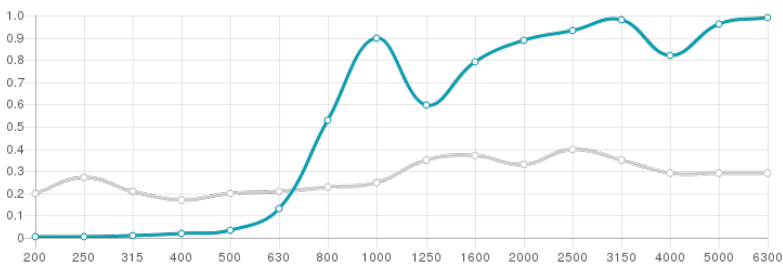

hello@artnovion.com

www.artnovion.com

19/02/2019



Logan W - Diffuser

Diffusion
PRO AUDIO & STUDIO

Specifications

Acoustic performance:

Scattering range | 600Hz to 6000Hz

FG | 595x595x60 mm

Finishing Material:


MDF Lacquer - FG (Furniture grade)

Click on a certain finish for more detailed information


Installation:

Mechanical

Logan Diffuser

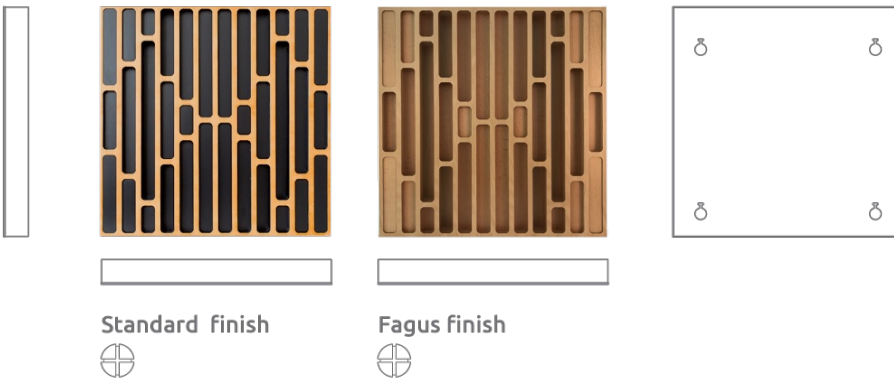

Fixing System



 Integrated fixing system

Product finishes

(FG) Product Fire Grade - Furniture Grade



FG | (L01) Blanc



FG | (L02) Noir



FG | (L03) Rouge



FG | (L05) Silver



FG | (L06) Noir
Vintage



FG | (L07) Graphite
Black



FG | (L08) Rose Gold



FG | (L09) Classic Gold



FG | (L10) Bronze



FG | (W 01) Cerise



FG | (W 02) Marron



FG | (W 03) Wenge



FG | (W04) Fagus



hello@artnovation.com

www.artnovation.com

19/02/2019