



Performance

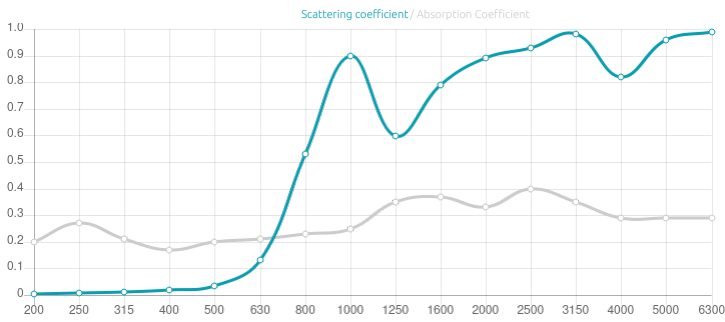

Technical Information

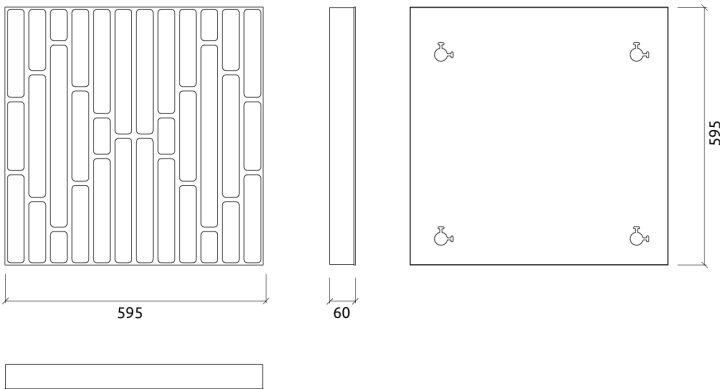

Features

Type: 2D - QRD Diffuser

Scattering range: 600 Hz to 6000 Hz

Available fire rate:  
FG | Furniture Grade

Materials:  
- Natural wood veneer | Lacquered HMDF | Solid wood  
- HMDF and plywood structure

Dimensions:

FG - LW | 595x595x60mm | 4.56 Kg  
FG - NW | 595x595x60mm | 4.58 Kg

Logan Diffuser provides diffusion over any bandwidth, given the precise width and depth of the integrated surface treatment. The scattering begins at 400 Hz and goes up to 4000 Hz. Usable for all noise control, but above all for musical applications.

Logan is a high quality and high-performance solution for broadcasting, recording or post-production studios, and music practice rooms. With a furniture grade quality and available in several woods and finishes.

### Product finishes

#### (FG - LW) Lacquered Wood Finishes



FG | (L01) Blanc



FG | (L02) Noir



FG | (L03) Rouge



FG | (L05) Silver



FG | (L06) Noir Vintage



FG | (L07) Graphite Black



FG | (L08) Rose Gold



FG | (L09) Classic Gold



FG | (L10) Bronze

#### (FG - NW) Natural Wood Finishes



FG | (W01) Cerise



FG | (W02) Marron



FG | (W03) Wenge

FG | (W04) Fagus | Fagus  
Interior

### Purpose

- Enlarging sweet spot
- Specular reflection control
- Flutter echo control

### Recommended for

- Control room
- Recording room
- Home studio
- Broadcast studio
- Drum room