



Performance

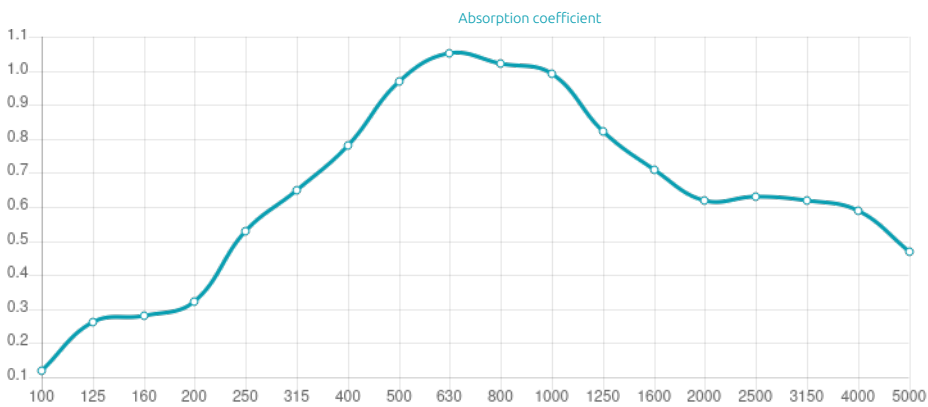

Features

Absorption Range: 315 Hz to 3150 Hz
Acoustic Class: C | (aw) = 0,7


Perforated area: 9%

Available Fire Rates:
FG | Furniture Grade
FR | Fire Rated

(FR) Materials:
- Natural wood veneer | Lacquered Fire retardant HMDF
- Fire retardant HMDF structural frame
- Sound PET absorption layer

(FG) Materials:
- Natural wood veneer | Lacquered HMDF
- Marine grade plywood structural frame
- Sound PET absorption layer

Technical Information

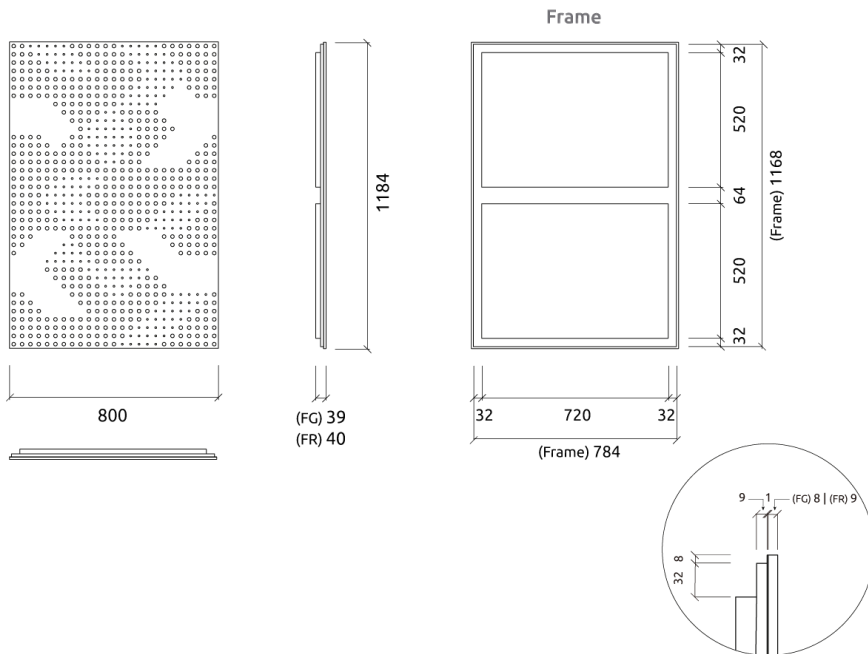

Dimensions:


- FG - LW | 800x1184x35mm | 8.6 Kg
- FG - NW | 800x1184x35mm | 8.6 Kg
- FR - LW | 800x1184x40mm | 8.6 Kg
- FR - NW | 800x1184x40mm | 8.6 Kg

Komodo's striking pattern unfolds seamlessly across surfaces, creating distinctive continuous designs that fit perfectly into any environment. Besides stunning visuals, Komodo is a very efficient acoustic tool, perfect for absorbing mid-range frequencies and providing effective diffusion and scattering over a large frequency range.

Recycled PET

Product finishes

(FG - LW) Lacquered Wood Finishes



FG | (L11) Raw White FG | (L12) Raw Black

(FG - NW) Natural Wood Finishes



FG | (W08) Wenge Natura FG | (W09) Black Walnut Natura FG | (W11) Okoumé Natura FG | (W12) Ash Natura

(FR - LW) Lacquered Wood Finishes




FR | (L13) Blanc Matte FR | (L14) Noir Matte

(FR - NW) Natural Wood Finishes



FR | (W08) Wenge Natura FR | (W09) Black Walnut Natura FR | (W11) Okoumé Natura FR | (W12) Ash Natura



Purpose

- RT reduction
- Flutter echo control
- Reducing excessive reverberation
- Improving speech intelligibility

Recommended for

- Office
- Meeting room
- Conference room
- Open workspace
- Coffee shop
- Restaurant

Fixing Systems

Wall & Ceiling



+ Panelling Batten