




Performance

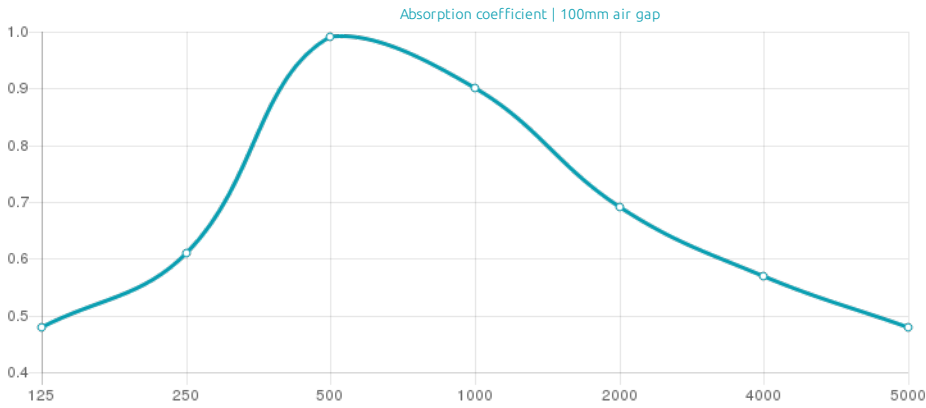

Technical Information

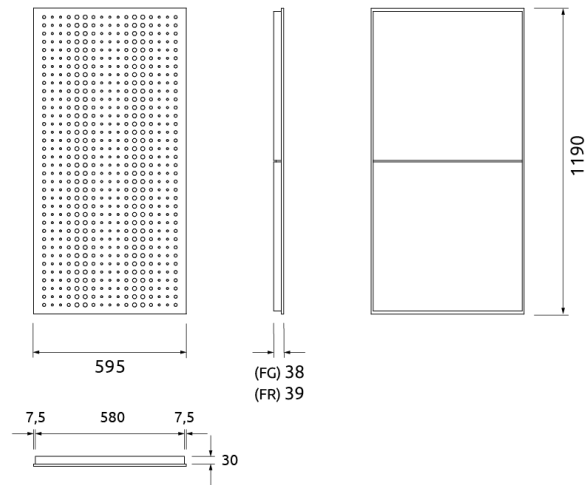

Features

Absorption Range: 350 Hz to 3150 Hz
Acoustic Class: C | (aw) = 0,7

Available fire rates:

- FG | Furniture Grade
- FR | Fire Rated

(FR) Materials:

- Fire retardant HMDF
- Sound PET

(FG) Materials:

- Natural wood veneer | Lacquered HMD
- Sound PET

Perforated area: 8%

Dimensions:

- FG - LW | 595x1190x38mm | 6.0 Kg
- FG - NW | 595x1190x38mm | 6.0 Kg
- FR - LW | 595x1190x39mm | 6.0 Kg
- FR - NW | 595x1190x39mm | 6.0 Kg

The refurbished Artnovion ceiling tile range is the perfect acoustic solution to apply on any T-frame grid system. This product line features adapted versions of the panel designs you love, all fully compatible with public building regulations and available in 4 different sizes – two for metric sized (M) and two for imperial sized (I) grid structures. Our ceiling tiles provide a simple, fast installation procedure in multiple environments such as shopping centers, offices, clinics and waiting rooms.

Product finishes

(FG - LW) Lacquered Wood Finishes



FG | (L11) Raw
White



FG | (L12) Raw
Black

(FG - NW) Natural Wood Finishes



FG | (W08) Wenge
Natura



FG | (W09) Black Walnut
Natura



FG | (W11) Okoumé
Natura



FG | (W12) Ash
Natura

(FR - LW) Lacquered Wood Finishes



FR | (L13) Blanc
Matte



FR | (L14) Noir
Matte

(FR - NW) Natural Wood Finishes



FR | (W08) Wenge
Natura




FR | (W09) Black Walnut
Natura



FR | (W11) Okoumé
Natura



FR | (W12) Ash
Natura



Purpose

- RT Reduction
- Improving speech intelligibility
- High frequency absorption

Recommended for

- Office
- Hospitality
- Public Spaces
- Conference Room
- Auditorium