






Performance

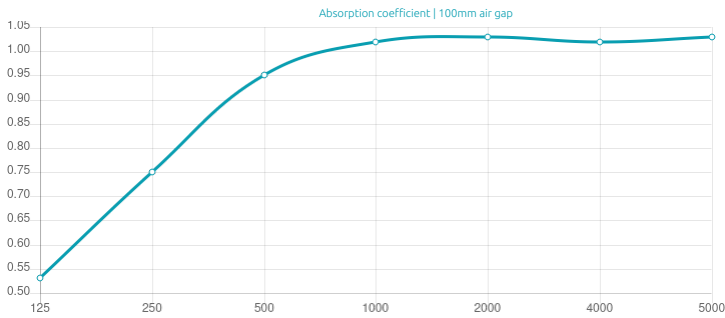

Technical Information

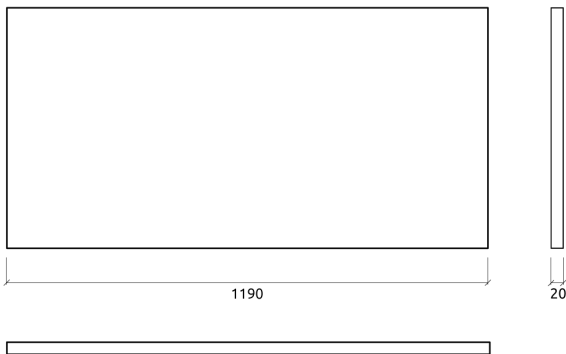

Features

Absorption Range: 315 Hz to 4000 Hz  
Acoustic Class: A | (aw) = 0,9

Recycled PET absorption- Class 1 product according to the OEKO-TEX@ Standard 100.

This product is available in the following Fire Rate:  
FR | Fire Rated

PRODUCT COMPOSITION:

- Aura Print Patterns | Print Finishes (FR)
- Print Finishes
- Sound PET acoustic core - Euro Class B

\* also available for imperial sized ceiling grids, upon request.

Metric Ceiling Grid | 600x1200mm

The PET core is a material made entirely from recycled PET plastic, that undergoes an environmentally-friendly transformation process into the non-woven acoustic core we use in this panel. To keep this process as efficient as possible, the thickness of the product may vary slightly (±3mm).

Dimensions:

FR - PP | 595x1190x20mm | 0.82 Kg

Aura Poly Print is made entirely from recycled PET, a sustainable material with exceptional acoustic properties. This ceiling tile range offers a choice of high-resolution printed solid colours, patterns and textures that create stunning visuals effects – from abstract art to simulating real claddings and materials.

These minimalistic lightweight panels drop easily on standard European ceiling grids, granting fast, effortless installation.

**Product finishes**

(FR - PP) PET Print Finishes



FR | (P001) Dijon



FR | (P0010) Mint



FR | (P0011) Cloud



FR | (P0012) Raven



FR | (P0013) Porcelain



FR | (P0014) Light Blue



FR | (P002) Klein



FR | (P004) Peanut



FR | (P005) Shadow



FR | (P006) Stone




FR | (P007) Art Blue



FR | (P008) Atmosphere



FR | (P009) Tan



**Purpose**

- RT Reduction
- Improving speech intelligibility
- High frequency absorption

**Recommended for**

- Office
- Hospitality
- Public Spaces
- Conference Room
- Auditorium